

# ZC34

# CE




### 技术参数/Technical info


力量级别/Power size	EN2	EN3	EN4	EN5
最大门宽(mm)/Width of door max(mm)	850	950	1100	1250
最大门重(kg)/Weight of door max(kg)	40	60	80	100
产品重量(kg)/Weight of body(kg)	1.60-1.80			
铁壳尺寸(mm)/Dimension of cement box(mm)	L210×W55×H39.5			
使用寿命/Passed durability test	500,000次/500,000 cycles			

 通过CE认证: 

4	8	5	1	1	4
		2			

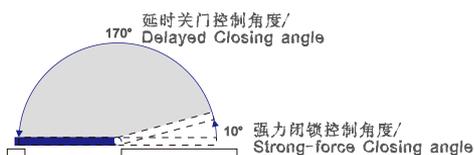  
 证书编号: 0359-CPR-00327


1. 关门速度调节范围: 180°-10°
2. 闭门速度调节范围: 10°-0°
1. Closing speed adjustment range 180°-10°
2. Door closer speed adjustment range 10°-0°

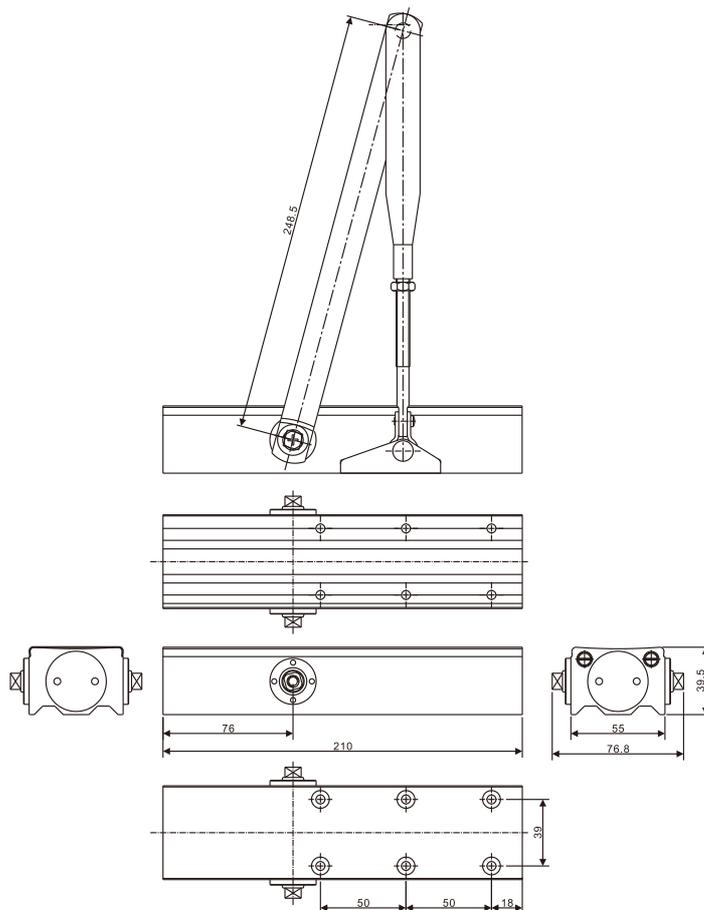

### ●Feature/特点

- High quality imported gaskets to prevent oil leakage.  
( 高品质进口垫圈防止漏油。 )
- Strong spring to guarantee powerful closing.  
( 强力弹簧, 闭门力度大。 )
- Fine quality aluminium alloy body. Provided with 2 coatings for protection.  
( 优质铝合金机体, 两层光亮层保护。 )
- Full hydraulic control of closing speeds by the help of adjustable valves.  
( 全液压控制可调阀门关闭速度。 )
- 2 speed controls: closing speed and latching speed.  
( 两个调速阀独立控制两段闭门速度。 )